




**DIRECT AC
DRIVERLESS**

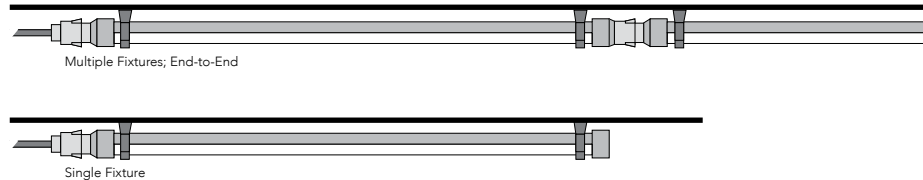

DRIVERLESS AC LED LUMINAIRE

Product Features

Maintenance-Free Driverless Design

Connects directly to AC line voltage without an LED driver or electrolytic capacitors, for extreme reliability and lifetime. Requires zero maintenance.

Easy to Install Quick-Connect Cabling

Convenient push-and-click connectors and cabling make GPX Series fixtures easy to install and daisy chain.

Coextruded Copolyester/Aluminum Housing

Our patented process combines copolyester and aluminum together, with no seals or gaskets. The result is a single piece enclosure with excellent heatsinking characteristics for long lifetime.

Superior Chemical & UV Resistance

Seamless polymeric outer shell provides IP67 ingress protection and is specialized for superior chemical resistance. An additional protective coating is available which integrates a UV inhibitor and UV blocker for outdoor applications.

Ordering Information

Product	Length	Color Temp.	Lens Diffusion	UV Protection	Through Wired	Voltage
GPX						
	2 2-Foot	50K (standard) 5000 Kelvin	Blank (standard) Chemical Resistant Clear Lens	Blank (standard) No Coating, Rated for Indoor Use	Blank (standard) Connectors on Input & Output for ability to Daisy Chain fixtures	120V 120 VAC Input
	4 4-Foot	40K 4000 Kelvin	GC (glare control) Chemical Resistant Lens with Added Diffusion Sheet	UVO Outdoor-Rated with UV-Blocking Coating	SE (Single-Ended) Connector on Input Only, No Daisy Chain, for Standalone Install	277V 277 VAC Input
	6 6-Foot					
	8 8-Foot					

Performance Summary

Delivered Light Output: Up to 4,800 Lumens - 600 Lumens/Ft

Efficacy: 130 LPW

CRI: Typical 85 CRI

CCT: 5000K & 4000K

Lifetime: Designed to last 100,000 Hours at 25°C

Warranty: 5 Years (See ggled.net for Terms)

Mounting: Ceiling or Wall

Dimensions: Length Varies, Width 1.25" x Height 1.75"

Protection Class: IP67

Dimming: Yes, TRIAC Dimmable

Voltage: 120 VAC or 277 VAC Input

Maximum Run Length: Refer to the Table on Page 2

Ambient Temperature: -40°C to 55°C

Power & Connection Accessories

Cable	Type	Length	Wire	Mounting Hardware	Description
*No Jumper Cable Required on End-to-End Connection				GPX-MNT-NM	Non-Metalic Quick Latch
GPX-JMP-1	Jumper	1ft	18 AWG SJTW	GPX-MNT-SS	Stainless Steel Bolt Latch
GPX-JMP-2	Jumper	2ft	18 AWG SJTW		
GPX-JMP-4	Jumper	4ft	18 AWG SJTW		
GPX-JMP-8	Jumper	8ft	18 AWG SJTW		
GPX-LDR-10	Leader Cable	10ft	18 AWG SJTW		
GPX-LDR-25	Leader Cable	25ft	18 AWG SJTW		

*For serviceability and expansion/contraction considerations G&G limits the number of luminaires connected end-to-end (without a jumper cable) to a maximum of 4.

DRIVERLESS AC LED LUMINAIRE

Product Specifications

Construction & Materials

Convenient push-and-click connectors let you easily and rapidly install Leader Cables and Jumper Cables. Multiple cable lengths support a variety of layouts.

Integrated aluminum heat spreader.

Seamless polymeric outer shell provides IP67 ingress protection and is specialized for superior chemical resistance. An additional protective coating is available which integrates a UV inhibitor and UV blocker for outdoor applications.

All G&G luminaires and components (with the exception of our LED boards and drivers) are proudly manufactured and assembled in the USA.

Electrical System

Power Factor: 0.9 nominal.

Input Power: Stays consistent over life.

Temperature Rating: Designed to operate in temperatures -40°C to 55°C.

Total Harmonic Distortion: < 20%

Built-In 6KV Surge Protection

Regulatory Qualifications

cULus Listed

UL Listed for Wet Locations

DLC Listed

NEMA 4X Rated



**DIRECT AC
DRIVERLESS**




Photometry

GPX Series

Based on DTC Report Test #: 14404-T

Fixture photometry has been conducted by a NVLAP accredited testing laboratory in accordance with IESNA LM-79-08. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%.

Polar Candela Distribution

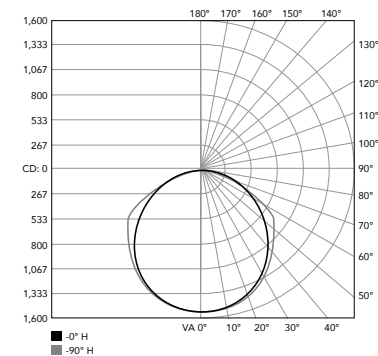

Zonal Lumen Summary

Zone	Luminaire
0-30	26.2%
0-40	43.2%
0-60	77.4%
0-90	98.5%
0-180	100%

Lumen & Power Data

Length & Output	Lumens	Wattage	Amps @120V	Amps @277V
GPX2	1200	9	0.075	0.032
GPX4	2400	18	0.150	0.065
GPX6	3600	27	0.225	0.097
GPX8	4800	36	0.300	0.130

Maximum Fixture Run

Maximum Fixture Run (Per 1 Leader Cable): 120VAC				
	GPX2 (9W)	GPX4 (18W)	GPX6 (27W)	GPX8 (36W)
JMP1 (1FT)	66 (198')	37 (185')	26 (182')	20 (180')
JMP2 (2FT)	59 (236')	34 (204')	24 (192')	19 (190')
JMP4 (4FT)	50 (300')	31 (248')	22 (220')	17 (204')
JMP8 (8FT)	40 (400')	26 (312')	19 (266')	15 (240')

Maximum Fixture Run (Per 1 Leader Cable): 277VAC				
	GPX2 (9W)	GPX4 (18W)	GPX6 (27W)	GPX8 (36W)
JMP1 (1FT)	157 (471')	89 (445')	63 (441')	48 (432')
JMP2 (2FT)	141 (564')	83 (498')	59 (472')	46 (460')
JMP4 (4FT)	119 (714')	73 (584')	54 (540')	42 (504')
JMP8 (8FT)	95 (950')	61 (732')	46 (644')	37 (592')