



INDUSTRIAL LIGHTING

T 800.285.6780 E sales@ggled.net

www.ggled.net

Date _____



Project _____

**CLASS-1
DIV-2
RATED**

**CLASS-2
DIV-2
RATED**



**IP68
IP69K
CERTIFIED**

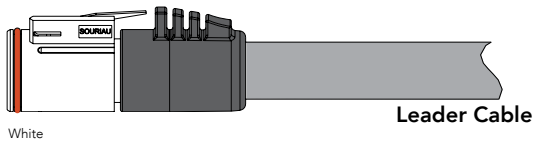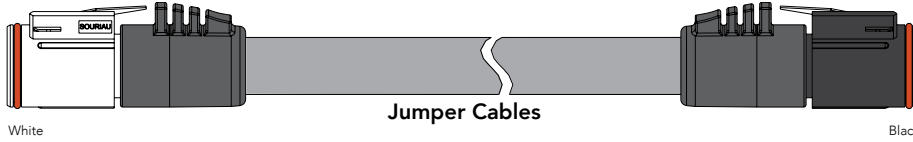

HLX-LDR/JMP IP68/IP69K LEADER & JUMPER CABLES

Product Features

Heavy Duty 14 ga SOOW Cabling

Easy to Install Quick-Connect Cabling

Extreme Sealing IP68/IP69K Connectors

Push Pull Locking Mechanism with Audible <click>

Oil, UV and Water Resistant

Class 1, Division 2 Groups A, B, C & D and Class 2, Division 2 Groups E, F & G

Ordering Information: Leader Cables


Product	Length
HLX-LDR	8 ft

Ordering Information: Jumper Cables

Product	Length
HLX-JMP	1 End-to-End, 4 ft, 8 ft

Leader Cable Installation:

In some installations, the Leader Cable must be extended to reach from the fixtures to the power supply. The wire gauge required will depend on the load and the run length (see chart below). This will limit the voltage drop to ~3V.

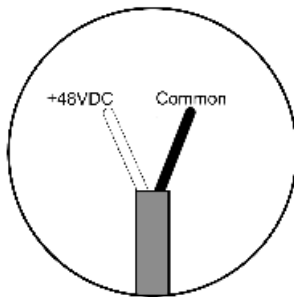

Load/Run Length	1-50 Feet	50-100 Feet	100-150 Feet
1-3 Lights (4A)	16AWG	14AWG	12AWG
4-6 Lights (8A)	14AWG	12AWG	10AWG
7-9 Lights (12A)	12AWG	10AWG	8AWG

Rev Date 19 0715

STRONG.

SIMPLE.

COMPACT.